

LifeSize Networker delivers the most cost effective way to leverage and connect all of your resources



Enhanced Gateway

LifeSize[®] Networker[™] is an enhanced, all-in-one gateway for integration between IP and ISDN networks. LifeSize Networker offers multiple compact network interfaces allowing users to connect LifeSize video systems with ISDN video systems.

(Seamless IP to ISDN connectivity)

LifeSize Networker enables IT administrators and network managers to provide users and departments with cost effective, complete connectivity to anyone, anywhere. Standards based, LifeSize Networker enables ISDN connectivity to H.264, H.263, and now H.261 codecs.

Use LifeSize Networker in a single-use configuration with one LifeSize video system or configured as a shared resource accessible by multiple LifeSize video systems. Either configuration provides easy access to ISDN networks all from one, easy to manage device.

Simplify your shared resource configurations. LifeSize Networker's new Dial Peer policy allows you to share Networker with multiple LifeSize video systems without the use of a Gatekeeper.

Seamless connectivity. Simple to Use. Cost effective. It means that your users can connect. Worry-free.

LifeSize Networker Key Features

Quality ISDN

Supports up to 8 calls spread over 1 PRI interface

Flexible Solution

Multiple modes of connectivity, Use as a standalone or shared device with multiple LifeSize video systems

Full Feature

Standards-based H.323 and ISDN H.320 solution

All-in-One Compact Interface

Includes 1x LAN to connect to the LifeSize video system or Ethernet switch and 1x PRI or 4x BRI to the ISDN network

High Value Solution

Regional departmental deployments to lower call costs, increase reliability, redundancy and manageability

Ease of Use

Plug and play and web browser interface for configuration

Cost Effective

Most cost effective way to leverage and connect all resources

Efficient, Compact Design

Uses Power over Ethernet (PoE) when integrated directly with a LifeSize video system

Product Specifications - LifeSize® Networker™

System Capacity

BRI - Supports up to four calls spread over a maximum 8B channels (512 Kbps) using BRI S/T interface
PRI - Supports up to eight calls spread over a maximum 23B (T1) channels (1472 Kbps) and 30B (E1) channels (1920 Kbps) using PRI interface
Partial PRI - Supports fractional PRI by using a contiguous subset of B channels

Endpoints Supported

Most LifeSize video systems* to any:
ISDN (H.320) video and audio end points
via ISDN to IP (H.323) video and audio end points

Gatekeeper Dialing Modes

Direct Inward Dial (DID)
TCS4

Non-Gatekeeper Dialing Modes

Hardwired
Direct Connect
Dial Peer

Gateway Features

H.323 Call Routing to ISDN
H.320 Call Routing to IP
H.323 Call Routing to IP via ISDN
Automatic ISDN downspeeding to available IP or ISDN rates at call setup and during the call

ISDN Call Features

Supports ETSI/NAT variants (AT&T 4ess, AT&T Sess, Nortel DMS 100, ETSI, NI, NTT)
Auto SPID detection (Only on National ISDN)
Supports Hong Kong PRI

Dual Video Support

Standards-based H.239 support for dual streaming support for presentations and collaboration for H.320 and H.323

Video Standards

H.261, H.263, H.263+, H.264,

Audio Standards

G.711 (A-Law/U-Law), G.722, G.722.1c (Polycom® Siren14™) (24Kbps/32Kbps), G.728

Additional Supported Standards

H.221, H.230, H.239, H.242, H.320, H.323, Bonding (ISO 13871)

Video Resolutions

Supports all H.320 video resolutions including CIF, 4CIF, SIF, 2SIF, 4SIF, HD

Quality of Service (QoS)

QoS support with Diffserv, IP Precedence (IntServ)

Network Interfaces

4 x BRI (RJ-45) S/T
1 x PRI T1/E1 (RJ-45)
1 x 10/100 Mbps auto sensing

System Management

Management via embedded Web server using HTTPS

Security

Flash-based Web management tool
Admin password
SNMP security alerts
Ability to disable IP services and Telnet

System Design

Physical Dimensions
Height: 42 mm / 1.65 in
Width: 215 mm / 8.46 in
Depth: 190 mm / 7.48 in
Weight: 1.043 Kg / 2.2 lbs

Power

POE 48VDC power
LifeSize external power supply (optional)

Environmental Data


Operating temperature: 0°C (32°F) to 40°C (104°F)
Operating humidity: 15% to 85%, non-condensing
Storage temperature: -40°C (-40°F) to 70°C (158°F)
Storage humidity: 10% to 90%



Regulatory Model Numbers
Model: LifeSize Networker-S/T = LFZ-002

For additional information:
www.lifesize.com/support

Information contained in this document is preliminary and subject to change without notice. LifeSize is a registered trademark or trademark of LifeSize Communications in the U.S. and other countries. Copyright 2008. All rights reserved. November 2008.

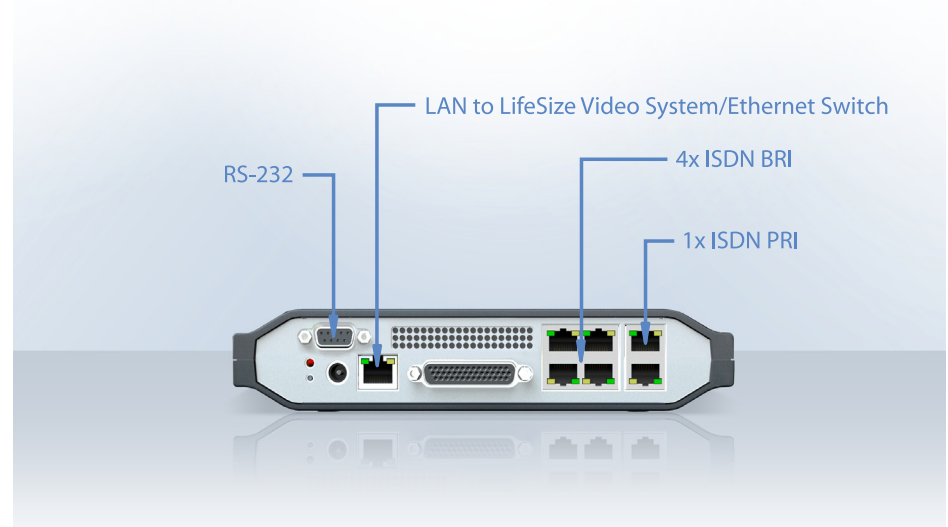

*Exceptions are LifeSize® Passport™ and LifeSize® Passport Connect™



AMERICAS:

LifeSize
1601 S. MoPac Expressway
Suite 100
Austin, Texas 78746 USA

+1 512 347 9300
Toll Free US +1 877 543 3749
E-mail info@lifesize.com
www.lifesize.com

EMEA:

LifeSize Regional Office
+49 89 20 70 76 0 (Germany)
Toll Free Europe 00 8000 999 09 799

APAC:

LifeSize Regional Office
+65 6303 8370 (Singapore)

© 2011 Logitech. All rights reserved. Information contained in this document is subject to change without notice. LifeSize is the registered trademark or trademark of Logitech. All other trademarks are the property of their respective owners.

DS_Networker_EN_0911